

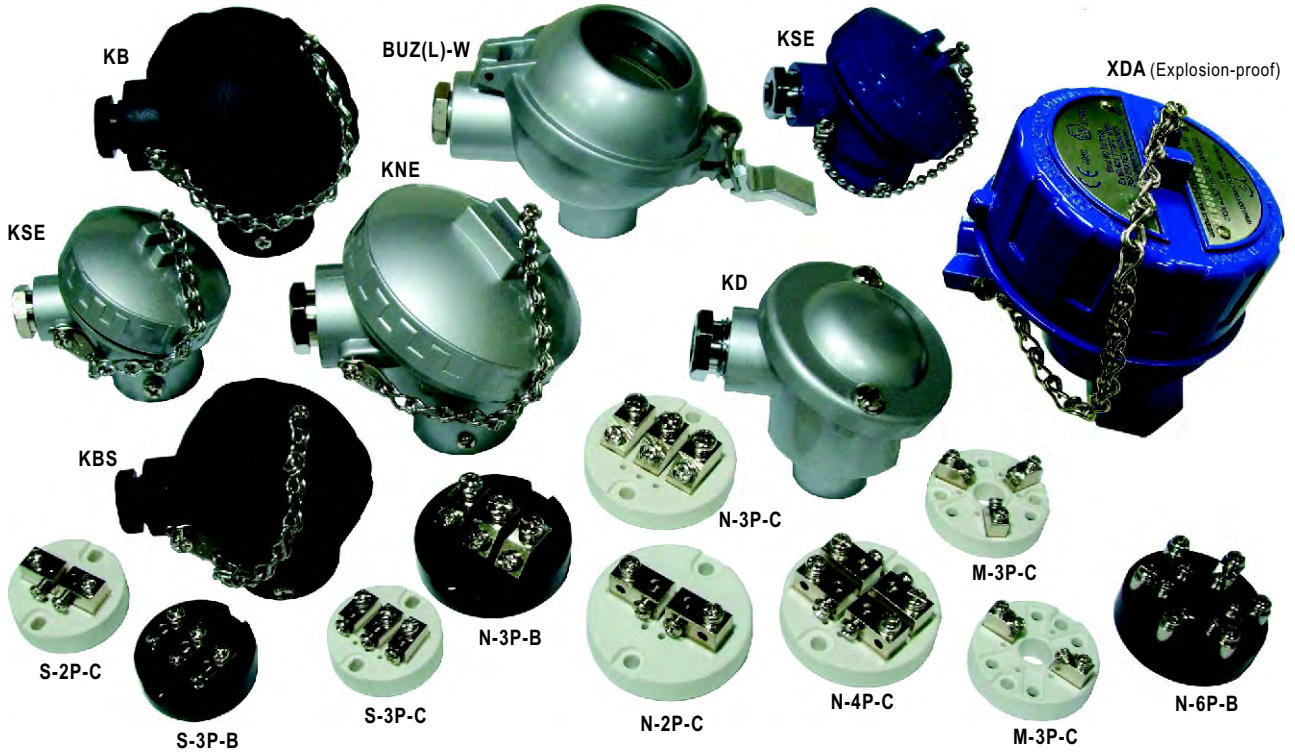
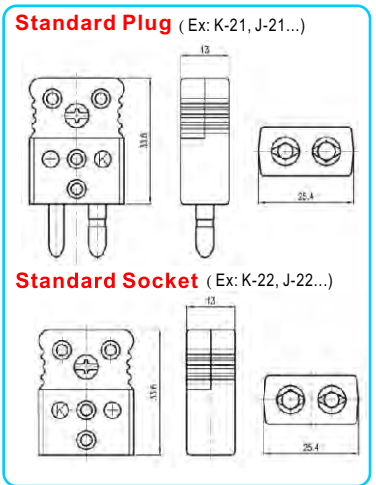



Probe Head & Terminal Block

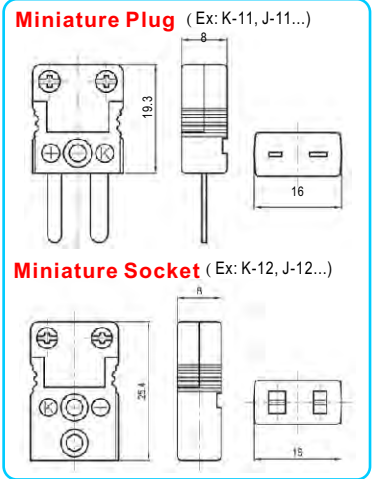

Thermocouple Connector

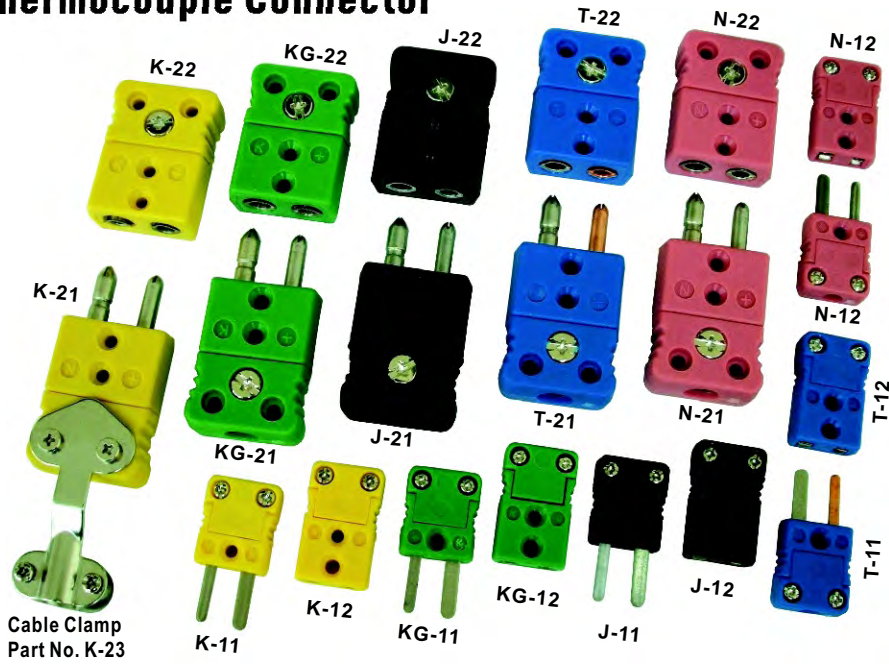

Miniature Ceramic Connector

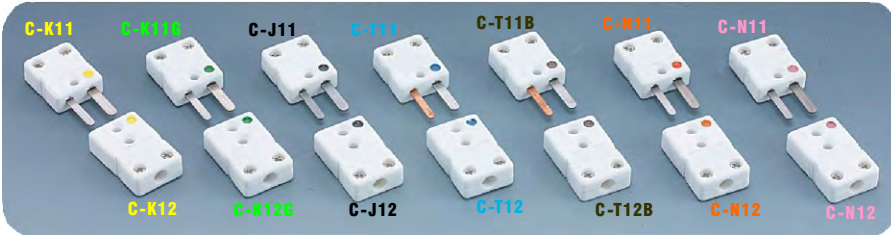

Standard Ceramic Connector



Thermocouple & Extension Wire

Thermocouple Grade	JIS Color Code	Type	Max. Temp.	Extension Grade	JIS Color Code	Type	Max. Temp.
TC-CA-H-1/0.3x2		K	0~200°C	WCA-G-IS-7/0.3x2		K	0~105°C
TC-IC-H-1/0.3x2		J	0~200°C	WIC-G-IS-7/0.3x2		J	0~105°C
TC-CA-H-1/0.6x2		K	0~200°C	WCA-G-IS-4/0.6x2		K	0~105°C
TC-IC-H-1/0.6x2		J	0~200°C	WIC-G-IS-4/0.6x2		J	0~105°C
TC-CA-H(OS)-1/0.6x2		K	0~200°C	WPR-G-IS-4/0.6x2		R	0~105°C
TC-IC-H(OS)-1/0.6x2		J	0~200°C	WCA-G-IS-7/0.6x2		K	0~105°C
TC-CA-H(SOS)-1/0.6x2		K	0~200°C	WIC-G-IS-7/0.6x2		J	0~105°C
TC-IC-H(SOS)-1/0.6x2		J	0~200°C	TC-PT-H(SOS)-1/0.6x3		RTD	0~200°C
TC-CA-H(SOS)-4/0.3x2		K	0~200°C	RTD-PVC-G		RTD	0~105°C
TC-IC-H(SOS)-4/0.3x2		J	0~200°C	RTD-PVC-B		RTD	0~105°C
TC-CA-G-1/0.6x2		K	0~200°C	RTD-TEF-26AWG		RTD	0~200°C
TC-CA-G-4/0.3x2		K	0~200°C	RTD-TEF-24AWG		RTD	0~200°C
K-Teflon-1/0.32x2		K	0~200°C	RTD-TEF-20AWG		RTD	0~200°C
J-Teflon-1/0.32x2		J	0~200°C				
T-Teflon-1/0.32x2		T	0~200°C				
K-Teflon-1/0.65x2		K	0~200°C				
Extension Wire							
WCA-H-4/0.3x2		K	0~200°C				
WIC-H-4/0.3x2		J	0~200°C				
WCA-H-7/0.3x2		K	0~200°C				
WIC-H-7/0.3x2		J	0~200°C				
WPR-H-7/0.3x2		R	0~200°C				
WCA-H-4/0.6x2		K	0~200°C				
WIC-H-4/0.6x2		J	0~200°C				
WPR-H-4/0.6x2		R	0~200°C				
WCA-H-7/0.6x2		K	0~200°C				
WIC-H-7/0.6x2		J	0~200°C				
WPR-H-7/0.6x2		R	0~200°C				
WCA-H(SOS)-7/0.3x2		K	0~200°C				
WIC-H(SOS)-7/0.3x2		J	0~200°C				
WCA-H(SOS)-4/0.6x2		K	0~200°C				
WIC-H(SOS)-4/0.6x2		J	0~200°C				
WPR-H(SOS)-4/0.6x2		R	0~200°C				
WCA-H(SOS)-7/0.6x2		K	0~200°C				
WIC-H(SOS)-7/0.6x2		J	0~200°C				
WPR-H(SOS)-7/0.6x2		R	0~200°C				
W-CA-G-4/0.3x2		K	0~105°C				
W-IC-G-4/0.3x2		J	0~105°C				
WCA-G-7/0.3x2		K	0~105°C				
WIC-G-7/0.3x2		J	0~105°C				
WCA-G-4/0.6x2		K	0~105°C				
WIC-G-4/0.6x2		J	0~105°C				
WCA-G-7/0.6x2		K	0~105°C				
WIC-G-7/0.6x2		J	0~105°C				
WCA-G(SOS)-7/0.3x2		K	0~105°C				
WIC-G(SOS)-7/0.3x2		J	0~105°C				
WCA-G(SOS)-7/0.6x2		K	0~105°C				
WIC-G(SOS)-7/0.6x2		J	0~105°C				



Model: LW-01	Model: LW-02	Model: LW-03	Model: LW-04
K-type (Yellow)	K-type (Green)	K-type (Blue)	K, J, Pt100/type (Black)

Accessories of Connector

Miniature Copper Inserts

Part No.	I.D.
M-1.7	1.7Ø
M-2.4	2.4Ø
M-3.3	3.3Ø

Standard Copper Inserts

Part No.	I.D.
S-3.3	3.3Ø
S-4.9	4.9Ø
S-6.5	6.5Ø

Stainless Steel Cable Clamps



Stainless Steel Panel Socket

