



Bobbin Heaters

For indirect heating of liquids and gases where the element is fitted into a pocket in the process tank or system. These are installed in large storage tanks so that the element may be replaced without draining down the system or vessel.

>> Type of heating

Indirect heating of liquids

>> Material

Stainless steel 316L
Titanium

>> Dimension

Ø25, 38, 50mm
Length as standard range
Acc. to customer specification

>> Fields of application

Industrial baths
Water heaters
Boilers
Oil pre-heaters
Water Tank

>> Connection

Wire out

>> Types


Standard range
Acc. to customer specification

>> Others

Terminal Head with epoxy sealed



BOBBIN HEATERS LIST

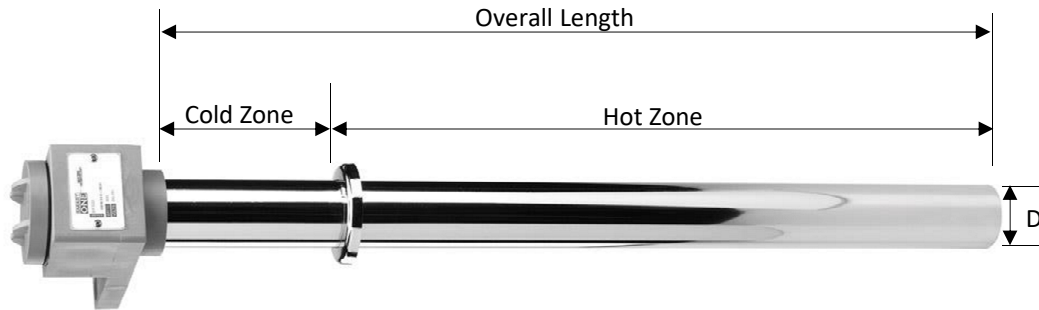

Dia 38mm Stainless Steel 316L Bobbin Heaters

Voltage / Watt	Cold Zone (Inch)	Hot Zone (Inch)	Overall Length (Inch)	Material	Diameter (MM)
240V 1KW	5"	6"	11"	SUS 316L	38MM
240V 2KW	7"	10"	17"	SUS 316L	38MM
240V 3KW	7"	22"	29"	SUS 316L	38MM
415V 3KW	7"	22"	29"	SUS 316L	38MM

Dia 50mm Stainless Steel 316L Bobbin Heater

Voltage / Watt	Cold Zone (Inch)	Hot Zone (Inch)	Overall Length (Inch)	Material	Diameter (MM)
240V 3KW	7"	22"	29"	SUS 316L	50MM
415V 3KW	7"	22"	29"	SUS 316L	50MM

Dia 25mm Titanium Bobbin Heaters

Voltage / Watt	Cold Zone (Inch)	Hot Zone (Inch)	Overall Length (Inch)	Material	Diameter (MM)
240V 3KW	7"	22"	29"	TITANIUM	25MM
415V 3KW	7"	22"	29"	TITANIUM	25MM

Note: Above are standard and exstock item and also provide custome require size and rating.