

THERMOCOUPLES

GHA-TC

PROBE TYPE TC

- This Type K thermocouple is suitable for a wide range of temperature from 32 to 752 °F (0 to 400 °C).
- Variety in cable length of this thermocouple makes it suitable for different applications and industries.
- For applications: Injection moulding machine, Mould & Oven measurement etc.

Features :

Standard Products with Diameter 5mm x Probe Length 2,4,6,10,12,24” (Inch).

Temperature Range: 0 ~ 400°C

Wire length or material can be customized. (Material available for PVC, Teflon, Fiberglass)



THERMOCOUPLES

GHA-TC

Standards stock Specifications:


| Part No. | Probe Length (Inch) Exclusive Thread | Lead Wire Length | Type | Temperature Range | Internal Insulation | External Insulation |
|-------------|--------------------------------------|------------------|------|-------------------|---------------------|--|
| K-D5/2"-2M | 2 Inch (50mm) | 2 Meters | K | 0 ~ 400°C | Fiberglass | Metal Shield (Stainless Steel Braided) |
| K-D5/4"-2M | 4 Inch (102mm) | 2 Meters | K | 0 ~ 400°C | Fiberglass | Metal Shield (Stainless Steel Braided) |
| K-D5/6"-2M | 6 Inch (153mm) | 2 Meters | K | 0 ~ 400°C | Fiberglass | Metal Shield (Stainless Steel Braided) |
| K-D5/10"-2M | 10 Inch (254mm) | 2 Meters | K | 0 ~ 400°C | Fiberglass | Metal Shield (Stainless Steel Braided) |
| K-D5/12"-2M | 12 Inch (305mm) | 2 Meters | K | 0 ~ 400°C | Fiberglass | Metal Shield (Stainless Steel Braided) |
| K-D5/24"-2M | 24 Inch (610mm) | 2 Meters | K | 0 ~ 400°C | Fiberglass | Metal Shield (Stainless Steel Braided) |

THERMOCOUPLES

GHA-TC

Ordering Information

Example Ordering Part Number selected

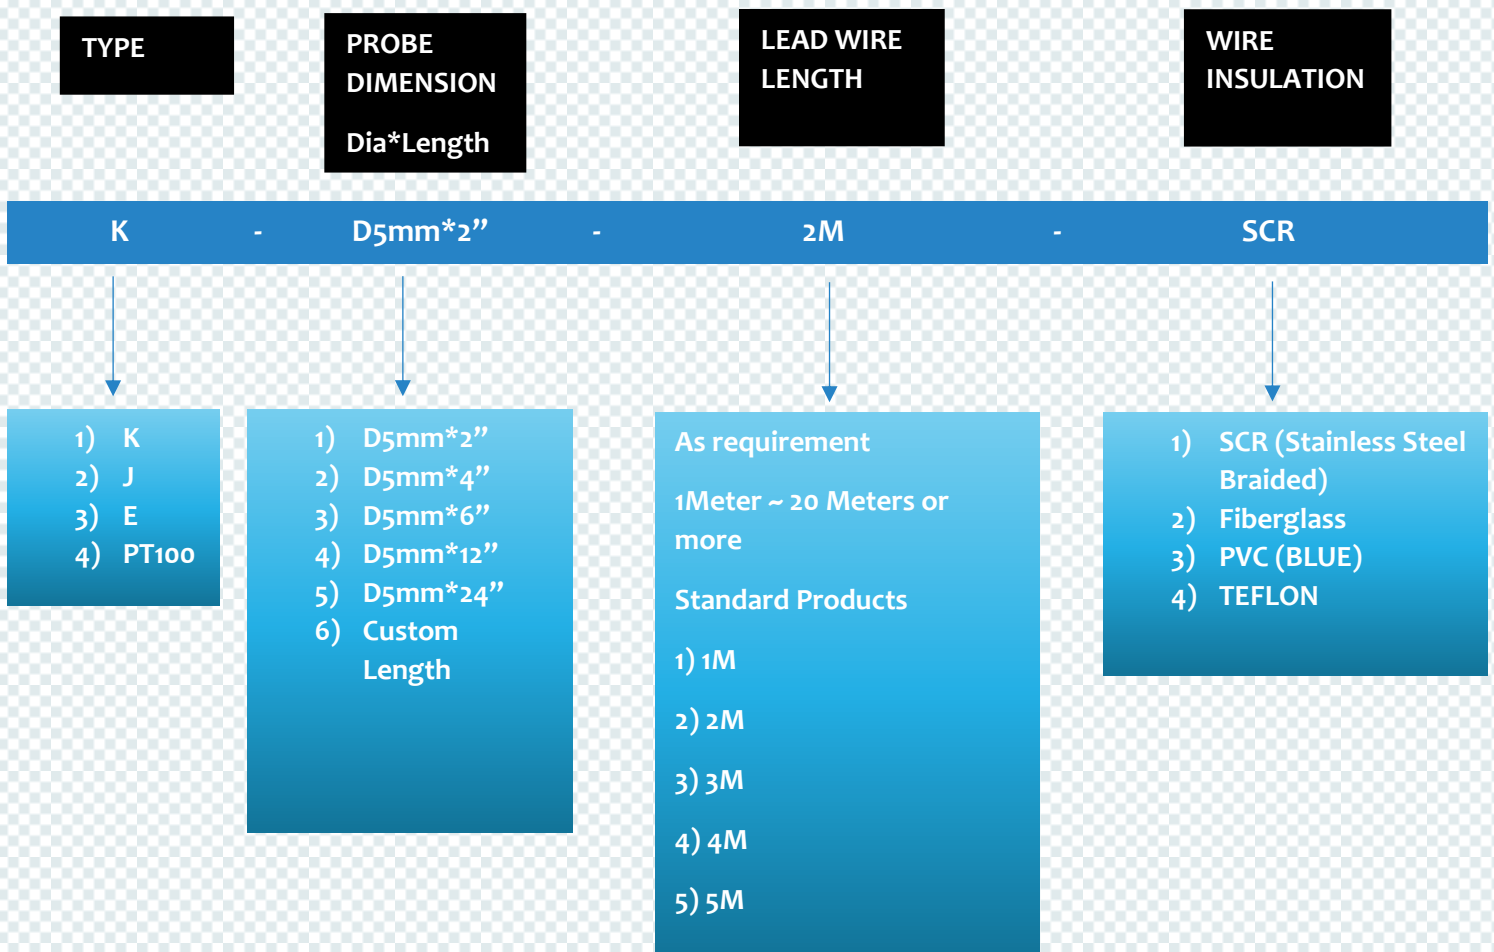

*Other sizes can be customized

Contact our office to get more information.

E-mail: sales@globalheating.com.my Tel: +604-4466986