



Immersion Quartz

Quartz Immersion Heaters

For use in most aqueous acidic plating solutions and pickling tanks. Check solution recommendation chart or with your chemical supplier for proper sheath material selection.

>> Connection

PVC Wire Out

>> Type of heating

Liquid Heating
Chemicals Heating

>> Types

Standard range
240V & 415V

>> Material

Quartz , Ceramit insulator ,Incoloy Elements

>> Others

Available for 1,2,3 KW

>> Dimension

Dia: 62.5mm(PVC Guard)
Length: 28.5, 21, 14.5 Inch.


>> Fields of application

Electro Plating
Chemicals Industry
Degreasing

SINGLE QUARTZ IMMERSION HEATERS

SPECIFICATION

- * 2 meter PVC Flexible Extension Cords.
- * 62.5 mm Dia. PVC Protection Guards.
- * 35.5mm Dia. Silica Quartz Tube Closed One End.

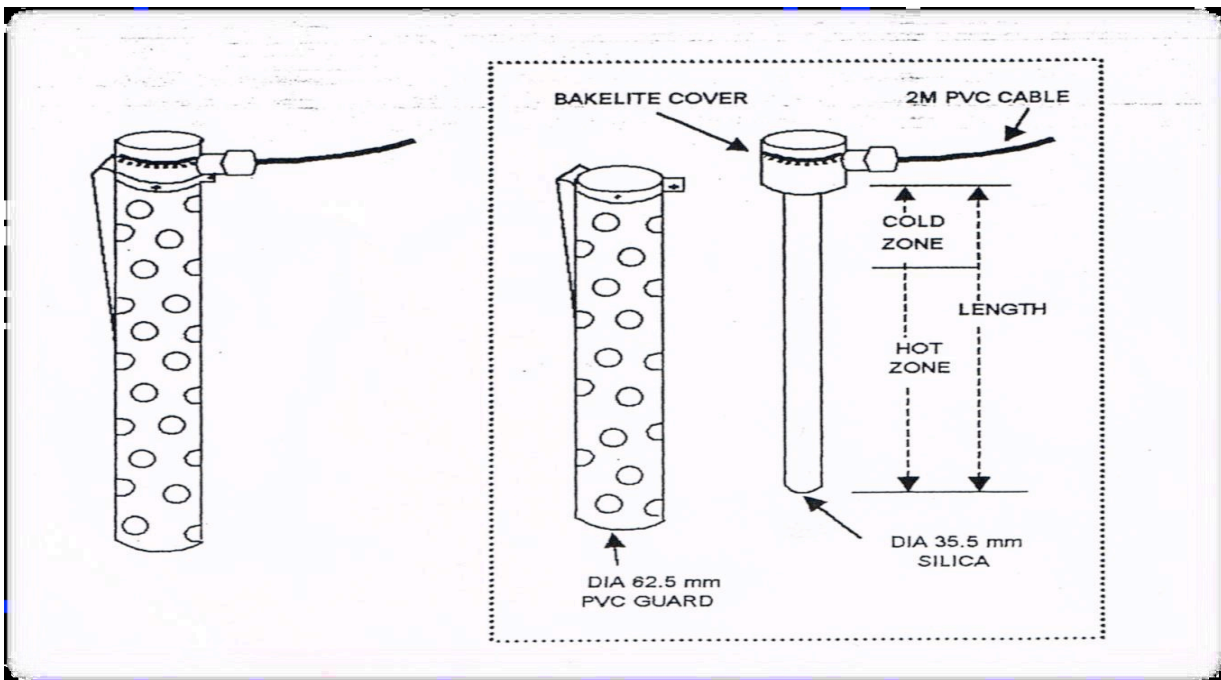

Model Number	Specifications				
	Volts	Watts	Length	Hot Zone	Cold Zone
QIH-1KW	240	1000	14.5'	10"	4.5"
QIH-2KW	240	2000	21"	15"	6"
QIH-3KW	240	3000	28.5'	19.5"	9"
QIH-3KW	415	3000	28.5'	19.5"	9"